

A distributed architecture for interacting with NAO


F. Badeig Q. Pelorson S. Arias V. Drouard I. Gebru X. Li G. Evangelidis R. Horaud



1. NAO Specifications

Hardware specifications

- CPU: Intel Atom Z530 (2×1.6 GHz 32 bits) • RAM: 1 GB
- Servomotors: 24 degrees of freedom

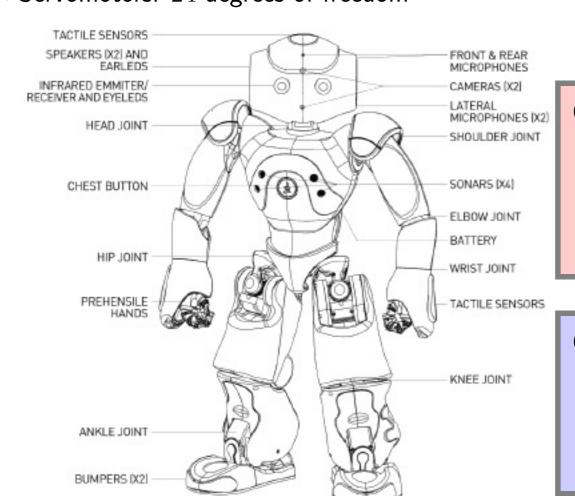


Embedded software

- Face detection, Sound localization
- Motion control, Posture control
- Speech recognition (predefined words or sentences in several languages)


M1



- 1- Limited on-board computing resources
- 2- Require advanced embedded-programming skills
- 3- Only few functionalities available




- 1- Using various programming environments (C++, Matlab, python)
- 2- Combining external toolboxes (OpenCV, etc.) with embedded software

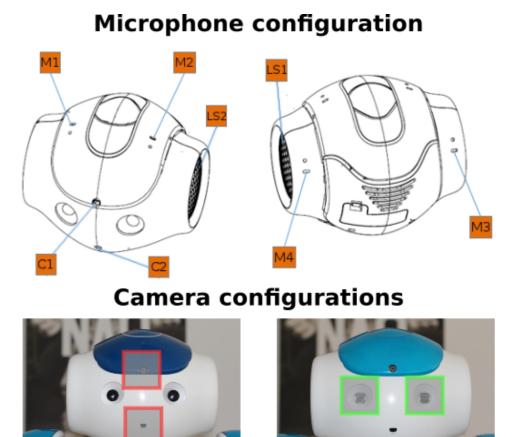


2. Proposed solution

A middleware to **access** and **control** NAO

[Advantage] Deploy advanced algorithms without embedded-software constraints

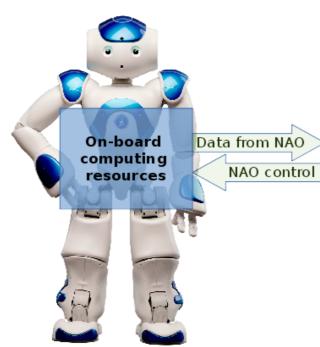

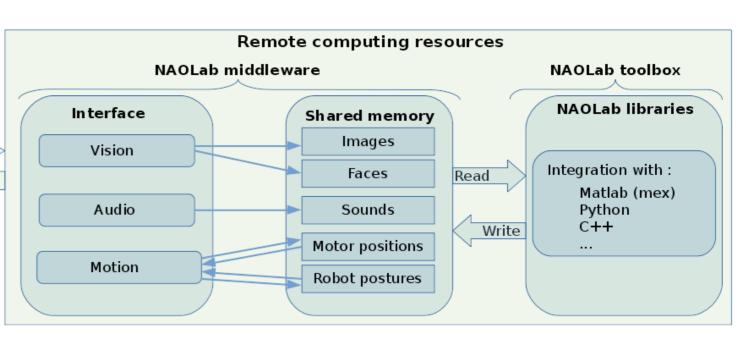

3. Toolbox to interact with NAO

Provides the following features:

- 1- The middleware complexity is transparent to the users
- 2- A user-friendly interface is provided

(NAOLab C++ and python libraries)

	NAOLab C++ library						
Control: setResolution() setCamera() Audio Access: getSound() Control: textToSpeech() playAudioFile() Access: getAllMotorInfo() getMotorInfo() getPosture()	Vision	Access:	getImage()	getImages()	getFaces()		
Audio Control: textToSpeech() playAudioFile() Motion Access: getAllMotorInfo() getMotorInfo() getPosture()		Control:	setResolution()	setCamera()			
Control: textToSpeech() playAudioFile() Motion	Audio	Access:	getSound()				
Motion		Control:	textToSpeech()	playAudioFile()			
	Motion	Access:	getAllMotorInfo()	getMotorInfo()	getPosture()		
		Control:	moveHead()	moveMotor()	moveToPoint()	setPosture()	

4. Example: Sound source localization (SSL) in Matlab

Requirements: Vision (grab images from left camera + face positions), Audio (grab sound buffers from microphones), Motion (control head motors)

